




The imix FreezeGuard Guarantee

imix FreezeGuard is guaranteed to resist freezing down to 20°F, set and achieve specified strength. In order to guarantee *imix FreezeGuard* meets these benchmarks, you must adhere to the following requirements:

- The concrete must be fully air entrained.
- Contractor should be ready to place concrete upon arrival of truck.
- Forms and subgrade must be free of frozen material and frost prior to concrete placement.
- No extra water can be added to the mix. During and after finishing the concrete, surface must be protected from added surface water and precipitation (rain, snow, ice, etc.)
- Slumps cannot exceed 6 inches.
- The ambient temperature must be 20° F or above until concrete reaches its initial set.
- Curing compound must be applied immediately upon completion of the finishing operations.

Any deviation from these requirements will nullify any guarantee.

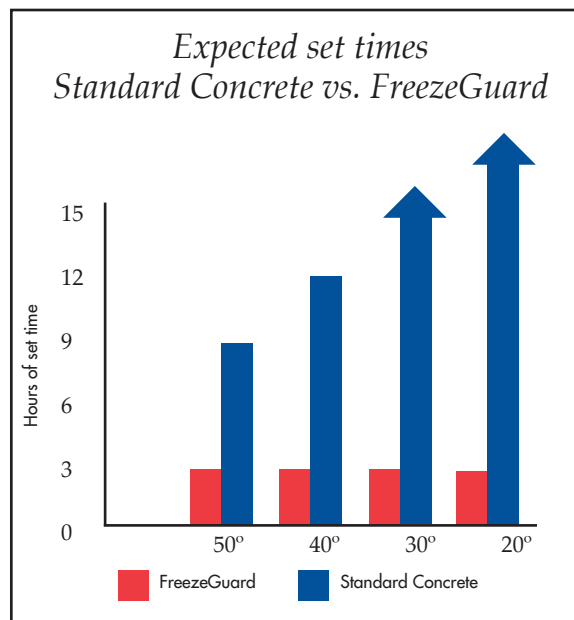

For more information on *imix FreezeGuard*, including technical assistance, contact the plant nearest your location at www.ironmat.com